Wi-Fi
Door Magnetic Detector

Operation Instructions

I.Appearance Introduction



II.Installation

1.Way for battery installation

❶ Open the rear cover of the emitter

❷ Place two 7# batteries (AAA batteries) properly



2 AAA batteries

❸ End of battery installation



❹ Close the rear cover



III.Tuya Smart

1.Download APP

Tuya Smart

Smart Life

- Scan the two-dimensional code and download "Tuya Smart or (Smart Life)".
- IOS: please download the "Tuya Smart or (Smart Life)" at apple application market.
- Android: please download the "Tuya Smart or (Smart Life)" at application market.

2.Register/login Tuya Smart



3. Network with mobile phone (two methods)

Method 1: Wi_Fi Quick Connect

❶

❷



❸



❹



⚠ **Observe whether the LED light flashes quickly**

❺

mart Smart Life

two-dimensional code and
d "Tuya Smart or (Smart Life)".
ase download the "Tuya Smart
rt Life)" at apple application

l: please download the "Tuya
r (Smart Life)" at application

gister/login Tuya Smart



3. Network with mobile phone (two methods)

Method 1: Wi_Fi Quick Connect

❶

❷



❸



❹



⚠ **Observe whether the LED light flashes quickly**

❺

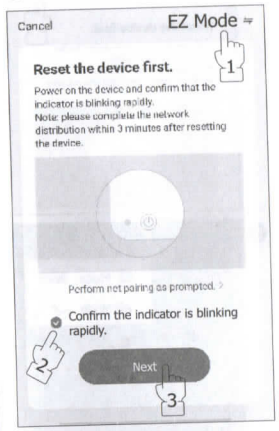

❻



❼

⚠ **Connection failed, please select hotspot network configuration mode**

Method 2: Hotspot distribution network

❶

❷



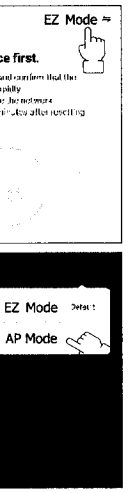

❼

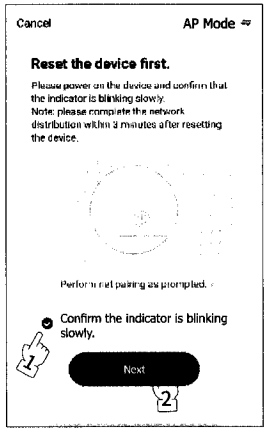

❽

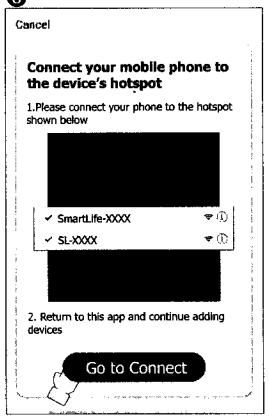

❾



❿



⓫



IV.Way for fixing and installation

3M glue fixing

① Tear off each side of release paper on two foam glue, and attach two foam glues respectively onto the fixing surfaces of the emitter and the magnetic stripe (as shown in Figure 1).

② Tear off the release paper on the back of the remitter and the magnetic stripe and attach it at the installation position of a door or a window (as shown in Figure 2).

Figure 1



Figure 2



V.Maintenance

1.Change the batteries

Battery lower power warning:

When the battery power is lower than 20%, the APP will warn that the battery needs to be replaced.

❶Remove the outer casing



❷ Use a screwdriver to take out the battery from the side



VI.Testing the emitter



VII.Specifications

Working voltage: DC3V (LR03AAA*2)

Static current: 30 μ A

Transmitting current: 35mA

Working environment: 0℃ - +50℃

WiFi: IEEE 802 11 b 2.4GHz

Alarm output: Tamper alarm,Open door reminder, Closing reminder, Low battery warning

❸

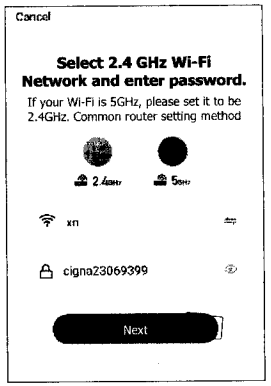

❹



⚠ **Observe whether the LED light flashes slowly, if it is not flashing slowly, press and hold for 5 seconds.**

❺



❻



❼

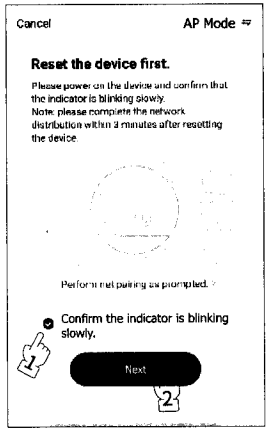

❽

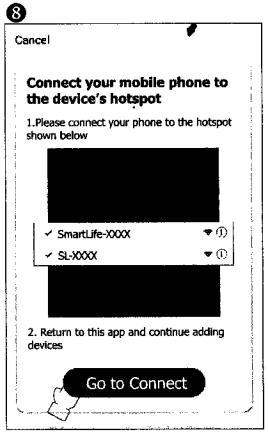

❾



❿



⓫

IV.Way f

3M glue fixi

① Tear off e
two foam gl
glues respec
surfaces of t
stripe (as sh

② Tear off th
of the rem
stripe and
position o
shown in